

## **$V_p$ - $V_s$ ratio sensitivity to pressure, fluid, and lithology changes in tight gas sandstones**

*Eugenia Rojas\*, Thomas L. Davis, Michael Batzle, Manika Prasad, Colorado School of Mines, Golden, CO, and Reinaldo J. Michelena, iReservoir.com, Inc., Littleton, CO*

### **Summary**

Low  $V_p/V_s$  anomalies can assist in prospect identification in tight gas sandstone reservoirs, because they are related to good quality rocks (sandstones with low clay content), presence of gas, and overpressure conditions. In such rocks, gas saturation lowers  $V_p/V_s$  and the effect is larger if the gas is overpressured. On the other hand, with water saturation,  $V_p/V_s$  increases and the effect is enhanced with decreasing differential pressure. Furthermore, tight gas sandstones typically have a  $V_p/V_s$  lower than that in shales.

### **Introduction**

Recent United States and world resource assessments (e.g., U.S. Geological Survey and National Petroleum Council) indicate that most of the future gas resources in the U.S. will be in unconventional reservoirs such as tight gas sandstones. Masters (1979) describes them as low porosity (7-15%) and low permeability (0.15 to 1mD) reservoirs with moderate water saturations (34-45%) located in the deeper portions of their respective basins.

Today, tight gas sandstone reservoirs are a vast resource, especially in the Rocky Mountain basins of the Western United States. Due to their complexity and our poor understanding of these unconventional petroleum systems, new technologies are necessary to successfully exploit them. Some of the geological challenges present in tight gas sandstone reservoirs are: high reservoir heterogeneity, very low porosity and permeability, possible presence of natural fractures, uncertainty in gas/water contact and high possibility of overpressures.

Methods for prediction of overpressured zones from elastic measurements in unconsolidated sands have been reported by several researchers (e.g., Prasad, 2002; Zimmer et al., 2002). However, very little work has been done in tight gas sandstones. Most of the empirical correlations between ultrasonic velocity and porosity, clay content and effective pressures in shaley sandstones (Eberhart-Phillips et al., 1989) are valid for medium to high permeability rocks. These correlations fail in tight gas sandstones (Tutuncu et al., 1994). Experimental studies of tight gas sandstones will allow us to better understand the correlations between their seismic and reservoir properties.

In this work, we have collected ultrasonic data on tight gas sandstone cores. We also analyzed cross-dipole sonic log data to understand the relations between elastic properties (e.g.,  $V_p/V_s$ , P- and S-impedance) and petrophysical properties (e.g., porosity, lithology). We show the effects of pressure, lithology and pore fluids on  $V_p/V_s$ . Finally, we quantify  $V_p/V_s$  variations due to changes in reservoir

properties of tight gas sandstones with the potential to apply this information to interpret  $V_p/V_s$  extracted from AVO analysis or multicomponent reflection data.

The following results from our analysis of core and log data from Rulison Field, Colorado, can be used to interpret seismic data in tight gas sandstones.

1.  $V_p/V_s$  variation due to pore fluid changes (100% gas to 100% brine) is approximately 8%. This change is less at partially saturated conditions and is enhanced by overpressure conditions.
2.  $V_p/V_s$  variation due to lithology changes (clean sandstone to shaley sandstone) is approximately 12%.
3.  $V_p/V_s$  variation for typical tight sandstone due to pore pressure increases (hydrostatic to overpressure) is approximately 6%.  $V_p/V_s$  variation due to pore pressure decreases (primary depletion) is less than 0.5% in unfractured tight sandstone cores.

### **Field Description**

#### Reservoir geology and production history

Rulison Field is located in the Piceance Basin, Colorado. Gas production is primarily from the Late Cretaceous Williams Fork Formation. Gas is trapped in a 1700-2400 ft interval of stacked, very low porosity and permeability (Figure 1), and commonly overpressured discontinuous fluvial sandstones with high irreducible water saturations (40-65%). A thin shale interval in the upper part of the Williams Fork Formation is a strong seismic reflector that possibly acts as a seal to build overpressures in the basin (Cumella and Ostby, 2003).

Although gas production in the Williams Fork Formation began in the 1960s, commercial production started in the mid-1980s, primarily through the use of hydraulic-fracturing technology. According to Williams Oil Co., the Williams Fork Formation contains up to 135 billion cubic feet of gas in place per section. However, since sands are lenticular and discontinuous, the drainage area is limited. Within the field, dry holes are rare, but uneconomic wells can occur, due to insufficient permeability in areas of little natural fracturing. The discontinuous nature and very low permeability of these sandstones require a well spacing of 20-acres or less to adequately drain the reservoir (Cumella and Ostby, 2003).

Figure 2 shows the pore pressure gradients measured from well tests in the U.S. DOE's Multiwell Experiment (MWX) site at Rulison field (Spencer, 1989). Down to 5200 ft the pore pressure gradient is 0.433 psi/ft, leading to a pore pressure of approximately 2250 psi. In the zone of interest

### $V_p$ - $V_s$ ratio sensitivity to pressure, lithology and fluids

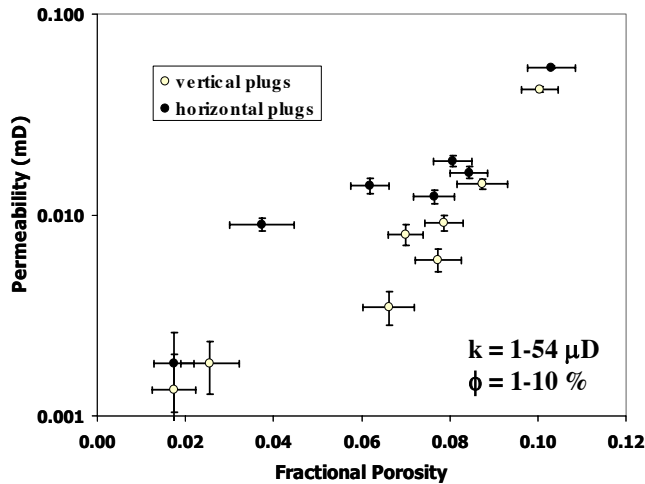


Figure 1: Klinkenberg corrected nitrogen permeability vs. fractional porosity measured in vertical and horizontal core plugs from Rulison Field, Colorado.

(5000-6500 ft) the pore pressure gradient increases with depth up to 0.68 psi/ft at 6500 ft, leading to a pore pressure of 4420 psi at a depth of 6500 ft. In general, pore pressure increases with depth to progressively larger overpressure gradients. Pore pressure decreases during primary depletion. However, due to high reservoir heterogeneity, production wells drain only small areas leading to overpressured zones in undrained areas.

#### Core and log data

Two cross-dipole sonic logs were acquired in the field during the last two years. Core samples were obtained from the U.S. DOE's Multiwell Experiment site (MWX) located in the Rulison field in the east-central portion of the Piceance Basin. Core samples were chosen from areas of interest (depth range from 5000 to 6500 ft).

#### Methodology

In this study, we show an integrated methodology to understand  $V_p/V_s$  sensitivity to pore pressure, fluid and lithology effects in tight gas sandstones. The results could be applied to interpret seismic data in terms of pore pressure, pore fluid and lithology. For example, calibrating the laboratory  $V_p/V_s$  variations due to pore pressure changes can help interpret time lapse seismic for monitoring purposes.

#### Laboratory measurements

We measured Klinkenberg-corrected nitrogen permeability at 500 psi for 15 samples (7 horizontal plugs and 8 vertical plugs). Porosities were measured at room conditions (Figure 1).

The pulse-transmission experimental setup for dry measurements consisted of a digital oscilloscope and a

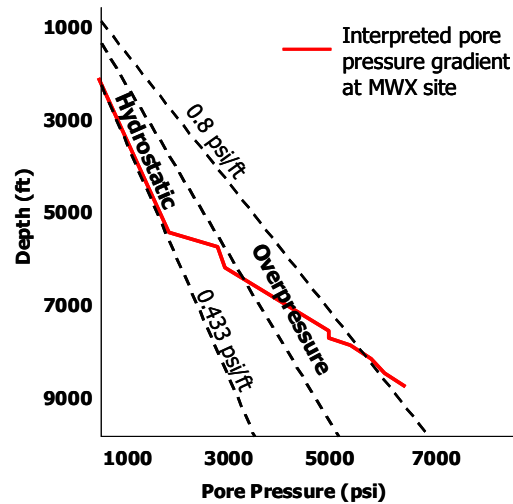


Figure 2: Pore pressure gradient measurements as function of depth at the U.S. DOE's Multiwell Experiment (MWX) site, Piceance Basin (modified from Spencer, 1989).

pulse generator. Piezo-ceramic transducers were used to generate P- and S-waves. Hydrostatic confining pressure was applied to the sample in a pressure vessel. Travel time was measured after digitizing each trace (time resolution 0.2  $\mu$ s). Instrumental errors are less than 2% for velocity measurements.

P- and S-wave velocities were measured in dry tight sandstones at differential pressure between 100 to 6000 psi. Velocities at in-situ saturation conditions were calculated from the dry-rock velocity using Gassmann's fluid substitution equations (Gassmann, 1951). Due to the large compressibility of gas, the in-situ velocity in a gas-saturated rock is very close to that in an air-filled rock at the same differential pressure. Using the measured ultrasonic data, we calculated velocities at in-situ conditions, and we analyzed the  $V_p/V_s$  behavior under different pressure conditions.

#### Log measurements

This phase includes: (1) quality control of the logs, (2) derivation of elastic properties ( $V_p$ ,  $V_s$ ,  $V_p/V_s$ , P- and S-wave impedance) of the formations from P- and S-wave travel time and density information, (3) calculation of water saturation from resistivity logs and, (4) identification of relations between elastic and petrophysical properties.

#### Overpressure and fluid effects on velocities

Analysis of ultrasonic P- and S-wave velocities in dry tight sandstones shows that  $V_p/V_s$  ratio at low differential pressures (overpressure conditions) decreases rapidly with pressure (Figure 3). For pressures greater than 2500 psi,  $V_p/V_s$  does not change much with pressure. The ultrasonic

### $V_p$ - $V_s$ ratio sensitivity to pressure, lithology and fluids

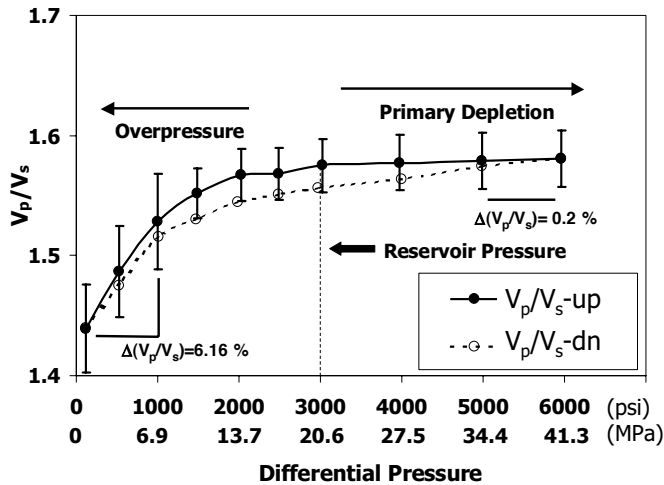


Figure 3.  $V_p/V_s$  versus differential pressure in a dry tight sandstone ( $\phi=10\%$  and  $k=42 \mu\text{D}$ , depth=5719 ft). Filled symbols are velocities measured while increasing confining pressure. Open symbols are velocities measured while decreasing confining pressure.

data show that  $V_p/V_s$  ratio can be used as an indicator of overpressure zones in tight gas sandstones (Figure 3).

$V_p/V_s$  sensitivity to different fluids under differential pressure changes is shown in Figure 4. Rulison gas bulk modulus was calculated considering a mixture (Batzie and Wang, 1992) of 85% methane, 10% nitrogen, and 5% ethane. Due to the large compressibility of gas, the in-situ velocity in a gas-saturated rock is very close to that in an air-filled rock (dry measurements) at the same differential pressure (Figure 4). Thus, measured velocity versus pressure data combined with fluid substitution can be used to predict velocity changes during the production process. This information can be used for time-lapse seismic data interpretation. Figure 4 shows that in water-saturated sandstones,  $V_p/V_s$  increases with increasing pore pressure (differential pressure decreases) and that an opposite trend exists for gas-saturated sandstones.

#### Lithology and fluid effects on velocities

P- and S- impedance and  $V_p/V_s$  from two dipole sonic logs acquired in the field were used to analyze their correlations with lithology and pore fluids.

P-wave velocity alone is not a good indicator of lithology because of the overlap in  $V_p$  for various types of rocks. Additional information provided by  $V_s$  reduces the ambiguity. Figure 5 shows different regions identified in the  $V_p/V_s$  versus P-impedance crossplot. We can observe that it is possible to discriminate lithologies from  $V_p/V_s$  measurements. However, P-impedance alone is highly affected by fluid effects and there is ambiguity in lithology separation. Combining both P- and S-wave information

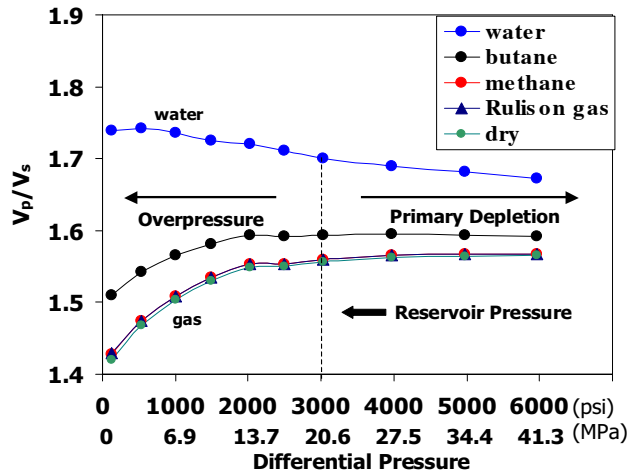


Figure 4.  $V_p/V_s$  versus differential pressure for a saturated sample (tight gas sandstone,  $\phi=10 \%$ ,  $k=42 \mu\text{D}$ , depth= 5719 ft). Fluid substitution using Gassmann's equation was done for 100% water saturation (salinity 25000 ppm), butane, methane and a mixture of gases (85% methane, 10% nitrogen and 5 % ethane.) which represents Rulison Field gas.

we can separate fluid effects and lithology as shown in Figure 5. Low  $V_p/V_s$  values are directly related to sandstones with low clay content. Generally, there is a small increase in  $V_p/V_s$  for sandstones with more clay or shaliness. Shales themselves have significantly higher  $V_p/V_s$  than sandstones. Figure 5 shows a decrease in  $V_p/V_s$  and P-impedance for gas-saturated sandstones and an increase of  $V_p/V_s$  and P-impedance for water-saturated sandstones.

S-wave impedance is less affected by fluid effects, therefore a crossplot of  $V_p/V_s$  versus S-wave impedance color-coded by gamma ray measurements shows a better lithology discrimination (Figure 6). Tight sandstones will typically have a  $V_p/V_s$  lower than 1.7, while shales will have  $V_p/V_s$  higher than 1.7. Thus, we expect a decrease in  $V_p/V_s$  from shales to reservoir sandstones. Typically, the presence of gas-saturated sandstones lowers the  $V_p/V_s$  even further ( $V_p/V_s$  of 1.6 or lower) and overpressure conditions can lower  $V_p/V_s$  even more (<1.5).

#### Discussion - Quantifying $V_p/V_s$ variations

From Figure 4, we estimate  $V_p/V_s$  variation for a typical tight sandstone due to pore fluid changes (100% gas to 100% brine) is approximately 8%. This change is less at partially saturated conditions and is enhanced by overpressure conditions. Similarly, from Figure 6, we estimate the  $V_p/V_s$  variation due to lithology changes (clean to shaly sandstone) is approximately 12%.  $V_p/V_s$  variation for a typical tight sandstone due to pore pressure increases (hydrostatic to overpressure) is approximately 6%.  $V_p/V_s$

## $V_p$ - $V_s$ ratio sensitivity to pressure, lithology and fluids

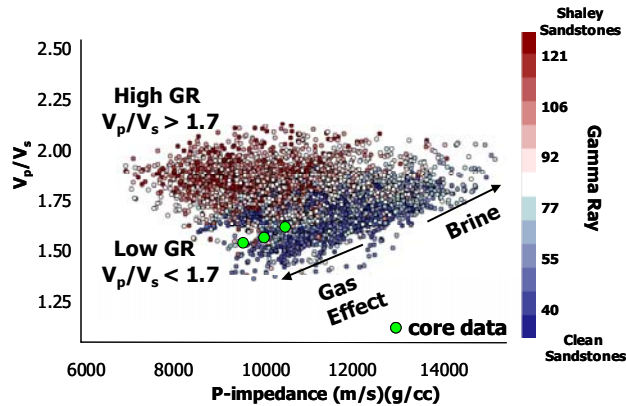


Figure 5.  $V_p/V_s$  versus P-wave impedance calculated from two dipole sonic logs in Rulison Field tight sands and shales. Blue symbols are for low gamma ray values. Red symbols are for high gamma ray values. The gas and brine effects are shown with the arrows. Gas saturated sandstone core data are integrated in the chart (green symbols).

variation due to pore pressure decreases (primary depletion) is less than 0.5% in unfractured tight sandstone cores.

The results show that lithology has a significant influence on  $V_p/V_s$ . Fluid effects on  $V_p/V_s$  are significant but less than lithology effects.  $V_p/V_s$  changes due to primary depletion (pore pressure decreases) are difficult to observe in tight gas sandstones. However,  $V_p/V_s$  is more sensitive to pore pressure increases and could be used as an overpressure indicator.

The possibility of detecting pressure, lithology and fluid effects by analyzing  $V_p/V_s$  extracted from AVO analysis or multicomponent reflection data, will depend on the accuracy of the velocities obtained from seismic. Discrimination between the different effects from seismic is difficult. However, at Rulison field, low  $V_p/V_s$  anomalies can be interpreted as a prospect indicator, since we are looking for gas-saturated sandstones preferably at overpressure conditions (undrained areas) and we have shown that in this case, fluid, lithology and pressure conditions, all contribute to lower  $V_p/V_s$ .

### Conclusions

Low  $V_p/V_s$  (<1.5) is related to good quality rocks (sandstones with low clay content) and gas overpressure conditions in tight gas sandstones.  $V_p/V_s$  changes due to lithology, pressure and fluid effects are quantified using core and log data. The results could be used to identify prospect areas at Rulison Field and could be applied as well in other tight gas sandstone reservoirs.

### References

- Batzle, M. and Wang, Z., 1992, Seismic properties of pore fluids: *Geophysics*, **57**, 1396-1408.
- Cumella, S. and Ostby, D., 2003, *Geology of the Basin-*

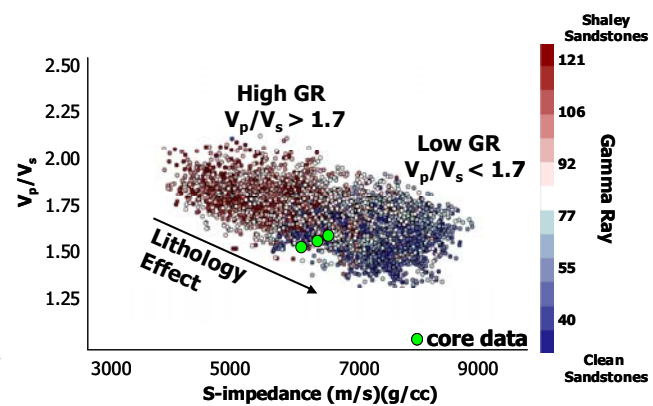


Figure 6.  $V_p/V_s$  versus S-wave impedance calculated from two dipole sonic logs in Rulison Field tight sands and shales. Blue symbols are for low gamma ray values. Red symbols are for high gamma ray values. Core data are integrated in the chart (green symbols). The arrow shows the trend of a  $V_p/V_s$  decrease and S-impedance increase due to the presence of clean sandstones.

Centered Gas Accumulation, Piceance Basin, Colorado: *Rocky Mountain Association of Geologists*, Chapter 10, 171-193.

Eberhart-Phillips, D., Han, D. H. and Zoback, M.D., 1989, Empirical relationships among seismic velocity, effective pressure, porosity, and clay content in sandstone: *Geophysics*, **40**, 949-954.

Gassmann, F., 1951, Elastic waves through a packing of spheres: *Geophysics*, **16**, 673-685.

Masters, J., 1979, Deep basin gas trap, Western Canada: *AAPG Bulletin*, **63**, 152-181.

Prasad, M., 2002, Acoustic measurements in unconsolidated sands at low effective pressure and overpressure detection: *Geophysics*, **67**, 405-412.

Spencer, C.W., 1989, Comparison of overpressuring at the Punedale anticline area, Wyoming, and the Multiwell experiment site, Colorado: *U.S.G.S. Bulletin* 1886, p. 16.

Tutuncu, A., Podio, A., and Sharma, M., 1994, An experimental investigation of factors influencing compressional- and shear- wave velocities and attenuations in tight gas sandstones: *Geophysics*, **59**, 77-86.

Zimmer, M., Prasad, M., and Mavko, G., 2002, Pressure and porosity influences on  $V_p$ - $V_s$  ratio in unconsolidated sands: *The Leading Edge*, 178-183.

### Acknowledgments

We are greatly indebted to Ronny Hofmann for his helpful comments and suggestions, and to Matt Silbernagel for helping to acquire ultrasonic data. The Reservoir Characterization Project and the Center for Petrophysics at Colorado School of Mines supported this work. Laboratory measurements were performed at the Center for Rock Abuse at Colorado School of Mines.

## EDITED REFERENCES

Note: This reference list is a copy-edited version of the reference list submitted by the author. Reference lists for the 2005 SEG Technical Program Expanded Abstracts have been copy edited so that references provided with the online metadata for each paper will achieve a high degree of linking to cited sources that appear on the Web.

Vp-Vs ratio sensitivity to pressure, fluid, and lithology changes in tight gas sandstones

### References

- Batzle, M., and Z. Wang, 1992, Seismic properties of pore fluids: *Geophysics*, **57**, 1396–1408.
- Cumella, S., and D. Ostby, 2003, Geology of the basin-centered gas accumulation, Piceance Basin, Colorado: *Rocky Mountain Association of Geologists*, 171–193.
- Eberhart-Phillips, D., D. H. Han, and M. D. Zoback, 1989, Empirical relationships among seismic velocity, effective pressure, porosity, and clay content in sandstone: *Geophysics*, **40**, 949–954.
- Gassmann, F., 1951, Elastic waves through a packing of spheres: *Geophysics*, **16**, 673–685.
- Masters, J., 1979, Deep basin gas trap, Western Canada: *AAPG Bulletin*, **63**, 152–181.
- Prasad, M., 2002, Acoustic measurements in unconsolidated sands at low effective pressure and overpressure detection: *Geophysics*, **67**, 405–412.
- Spencer, C. W., 1989, Comparison of overpressuring at the Punedale anticline area, Wyoming, and the Multiwell experiment site, Colorado: *U. S.G. S. Bulletin*, **1886**, 16.
- Tutuncu, A., A. Podio, and M. Sharma, 1994, An experimental investigation of factors influencing compressional- and shear- wave velocities and attenuations in tight gas sandstones: *Geophysics*, **59**, 77–86.
- Zimmer, M., M. Prasad, and G. Mavko, 2002, Pressure and porosity influences on Vp-Vs ratio in unconsolidated sands: *The Leading Edge*, **21**, 178–183.